

09

LED Strips & Profiles

Pages 199-236

SMD LED | LED
12V DC | 24V DC

 IP20 IP54 IP65 IP67 IP68

 DIMMABLE QUICK FIX  75 80 85 95
CRI CRI CRI CRI






LED Modules




7840 | 0,72W (3LEDs x 0,24W)

Double face adhesive.




Supplied in 10pcs chain.
Total length 1,7m.




7842 | 1,44W (4LEDs x 0,36W)

Double face adhesive.



Supplied in 10pcs chain.
Total length 1,25m.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840/D	Daylight	6000K	0,72W	48lm	12V DC		100	Requires 12V DC driver
7840/Y	Yellow	-	0,72W	-	12V DC		100	Requires 12V DC driver
7842/D	Daylight	6000K	1,44W	64lm	12V DC		100	Requires 12V DC driver
7842/BL	Blue	-	1,44W	-	12V DC		100	Requires 12V DC driver
7842/GR	Green	-	1,44W	-	12V DC		100	Requires 12V DC driver
7842/Y	Yellow	-	1,44W	-	12V DC		100	Requires 12V DC driver



The Indoor Range 12V



7821 | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.

IP20
75 CRI
DIMMABLE



7831 | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.

IP20
75 CRI
DIMMABLE



Accessories for 7821 & 7831

CE
Class III
50cm

7821
7824 Power supply cable
7822 Connector

7831
7834 Power supply cable
7832 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7821/D	Daylight	6000K	4,8W/m	360lm/m	12V DC	III	40	Requires 12V DC driver
7831/C	Cool white	4000K	14,4W/m	1050lm/m	12V DC	III	40	Requires 12V DC driver




7820/D

The 4,8W/m Indoor 24V



7820 | 4,8W/m | SMD 2216 | 70LEDs/m

3M Double face adhesive.



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



7820L | 4,8W/m | SMD 2216 | 60LEDs/m


Can be connected in full length / 3M Double face adhesive.



Supplied in 15m roll.




Dimming remote control.
Order code 20030.



7820/BL | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



7824

7822

Accessories for 7820 & 7820L











7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820/D	Daylight	6000K	4,8W/m	480lm/m	24V DC	III	40	Requires 24V DC driver
7820/C	Cool white	4000K	4,8W/m	480lm/m	24V DC	III	40	Requires 24V DC driver
7820/W	Warm white	3000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver
7820/EW	Extra warm white	2700K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver
7820L/C	Cool white	4000K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver
7820L/W	Warm white	3000K	4,8W/m	336lm/m	24V DC	III	40	Requires 24V DC driver
7820L/EW	Extra warm white	2700K	4,8W/m	312lm/m	24V DC	III	40	Requires 24V DC driver
7820/BL	Blue	-	4,8W/m	-	24V DC	III	40	Requires 24V DC driver

The 4,8W/m Outdoor 24V

	<p>7820W 4,8W/m SMD 2216 70LEDs/m Silicone 3M Double face adhesive.</p>
	<p>7820AW 4,8W/m SMD 3528 60LEDs/m Silicone NO adhesive.</p>
	<p>7820WL 4,8W/m SMD 2216 60LEDs/m Silicone Can be connected in full length / 3M Double face adhesive.</p>
	<p>7820W/BL 4,8W/m SMD 3528 60LEDs/m Silicone 3M Double face adhesive.</p>
 <p>7826 7828</p>	<p>Accessories for 7820W, 7820AW & 7820WL</p> <p>  7826 Mounting clip  7828 End cup </p>

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820W/D	Daylight	6000K	4,8W/m	432lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820W/C	Cool white	4000K	4,8W/m	432lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820W/W	Warm white	3000K	4,8W/m	390lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820W/EW	Extra warm white	2700K	4,8W/m	346lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820WL/W	Warm white	3000K	4,8W/m	302lm/m	24V DC		20	Requires 24V DC driver / Avoid direct sunlight
7820AW/W	Warm white	3000K	4,8W/m	280lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7820W/BL	Blue	-	4,8W/m	-	24V DC		40	Requires 24V DC driver / Avoid direct sunlight





The 9,6W/m 24V
SMD 2216 140LEDs/m





7823 | 9,6W/m | SMD 2216 | 140LEDs/m | Ultra slim

3M Double face adhesive.



7829 | 9,6W/m | SMD 2216 | 140LEDs/m

3M Double face adhesive.




Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7823/C	Cool white	4000K	9,6W/m	960lm/m	24V DC		40	Requires 24V DC driver
7823/W	Warm white	3000K	9,6W/m	864lm/m	24V DC		40	Requires 24V DC driver
7823/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC		40	Requires 24V DC driver
7829/C	Cool white	4000K	9,6W/m	960lm/m	24V DC		40	Requires 24V DC driver
7829/W	Warm white	3000K	9,6W/m	864lm/m	24V DC		40	Requires 24V DC driver
7829/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC		40	Requires 24V DC driver

The 14,4W/m CRI97 Indoor

Full spectrum










7835C/C






7835C | 14,4W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.







IP20
97
 CRI  **DIMMABLE** 



Accessories for 7835C




50cm


7835P Power supply cable
7837 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835C/C	Cool white	4000K	14,4W/m	1008lm/m	24V DC		40	Requires 24V DC driver
7835C/W	Warm white	3000K	14,4W/m	864m/m	24V DC		40	Requires 24V DC driver





The 14,4W/m Indoor 24V





7830 | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.




7835 | 14,4W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.



7835/EW | 14,4W/m | SMD 2835 | 60LEDs/m

3M Double face adhesive.



Accessories for 7830 & 7835



7830
7834 Power supply cable
7832 Connector

7835
7835P Power supply cable
7837 Connector


Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830/EW	Extra warm white	2700K	14,4W/m	980lm/m	24V DC		40	Requires 24V DC driver
7835/D	Daylight	6000K	14,4W/m	1300lm/m	24V DC		40	Requires 24V DC driver
7835/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC		40	Requires 24V DC driver
7835/W	Warm white	3000K	14,4W/m	1152lm/m	24V DC		40	Requires 24V DC driver
7835/EW	Extra warm white	2700K	14,4W/m	1060lm/m	24V DC		40	Requires 24V DC driver

The 14,4W/m Outdoor 24V



7830W | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



7835W/D | 14,4W/m | SMD 2835 | 60LEDs/m | Silicone


3M Double face adhesive.



Supplied in 5m roll.




Dimming remote control.
Order code 20030.



7835W | 14,4W/m | SMD 2835 | 70LEDs/m | Silicone

3M Double face adhesive.



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



7827 | Mounting clip for 7830W & 7835W



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7830W/D	Daylight	6000K	14,4W/m	900lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/D	Daylight	6000K	14,4W/m	1030lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/C	Cool white	4000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/W	Warm white	3000K	14,4W/m	1040lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/EW	Extra warm white	2700K	14,4W/m	910lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

The 19,2W/m Indoor 24V

	7825 19,2W/m SMD 2835 140LEDs/m	3M Double face adhesive.
	7870/C 19,2W/m SMD 3528 240LEDs/m	No shadow / 3M Double face adhesive.
	7870 19,2W/m SMD 2216 238LEDs/m	No shadow / 3M Double face adhesive.
	7875/D 19,2W/m SMD 3528 240LEDs/m	3M Double face adhesive.
	7875 19,2W/m SMD 2216 240LEDs/m	3M Double face adhesive.

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7825/C	Cool white	4000K	19,2W/m	1728lm/m	24V DC		40	Requires 24V DC driver
7825/W	Warm white	3000K	19,2W/m	1536lm/m	24V DC		40	Requires 24V DC driver
7825/EW	Extra warm white	2700K	19,2W/m	1344lm/m	24V DC		40	Requires 24V DC driver
7870/C	Cool white	4000K	19,2lm/m	1300lm/m	24V DC		40	Requires 24V DC driver
7870/D	Daylight	6000K	19,2lm/m	1920lm/m	24V DC		40	Requires 24V DC driver
7870/W	Warm white	3000K	19,2lm/m	1728lm/m	24V DC		40	Requires 24V DC driver
7875/D	Daylight	6000K	19,2lm/m	1400lm/m	24V DC		40	Requires 24V DC driver
7875/C	Cool white	4000K	19,2lm/m	1536lm/m	24V DC		40	Requires 24V DC driver
7875/W	Warm white	3000K	19,2lm/m	1344lm/m	24V DC		40	Requires 24V DC driver








The 24W/m Indoor 24V

SMD 2216



7845 | 24W/m | SMD 2216 | 300LEDs/m





No shadow / 3M Double face adhesive.





IP20
90
 CRI  **DIMMABLE** 



Supplied in 5m roll.

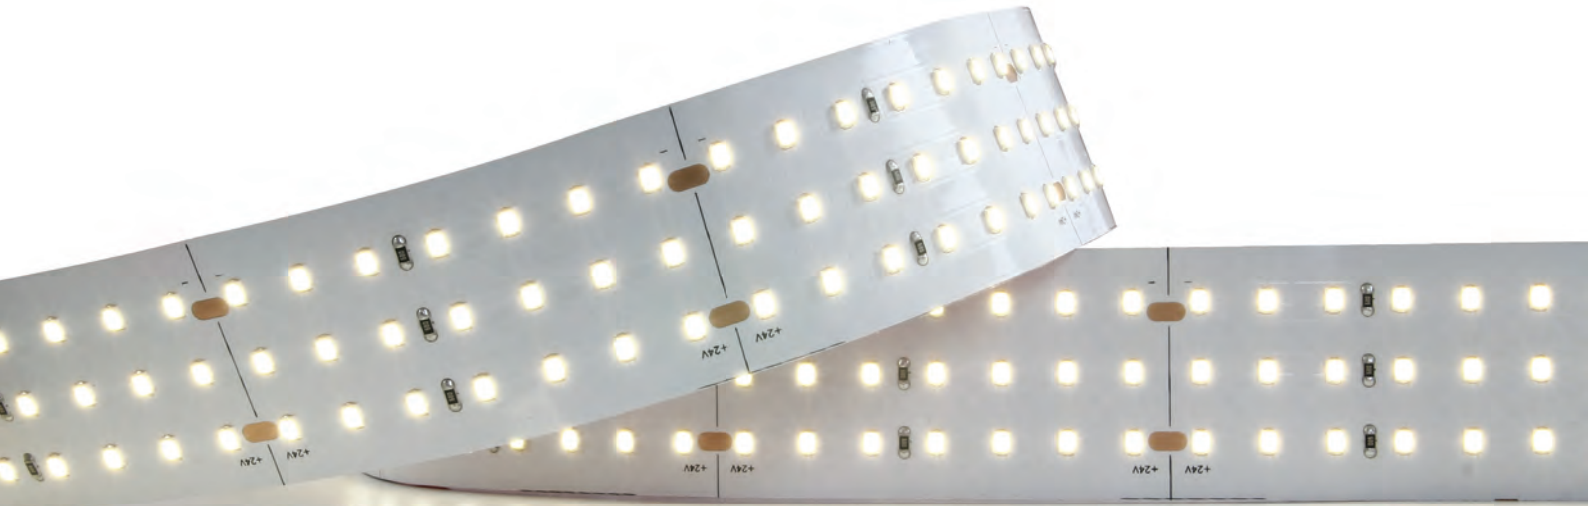

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7845/C	Cool white	4000K	24W/m	1900lm/m	24V DC		40	Requires 24V DC driver
7845/W	Warm white	3000K	24W/m	1800lm/m	24V DC		40	Requires 24V DC driver
7845/EW	Extra warm white	2700K	24W/m	1750lm/m	24V DC		40	Requires 24V DC driver



7885/W


The High Power Wide Strips 24V

20mm & 39mm



7880/W | 28,8W/m | SMD 5050 | 120LEDs/m

3M Double face adhesive.

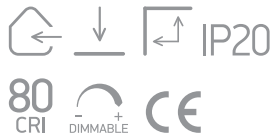


Supplied in 5m roll.



7880 | 28,8W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

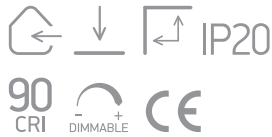


Supplied in 5m roll.




7885 | 48W/m | SMD 2835 | 294LEDs/m

3M Double face adhesive.

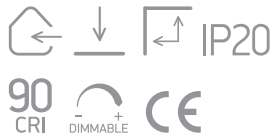


Supplied in 2m roll.

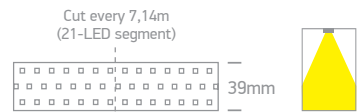

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7880/W	Warm white	3000K	28,8W/m	1800lm/m	24V DC		40	Requires 24V DC driver
7880/D	Daylight	6000K	28,8W/m	2304lm/m	24V DC		40	Requires 24V DC driver
7880/C	Cool white	4000K	28,8W/m	2304lm/m	24V DC		40	Requires 24V DC driver
7885/C	Cool white	4000K	48W/m	4800lm/m	24V DC		40	Requires 24V DC driver
7885/W	Warm white	3000K	48W/m	4320lm/m	24V DC		40	Requires 24V DC driver



2700K

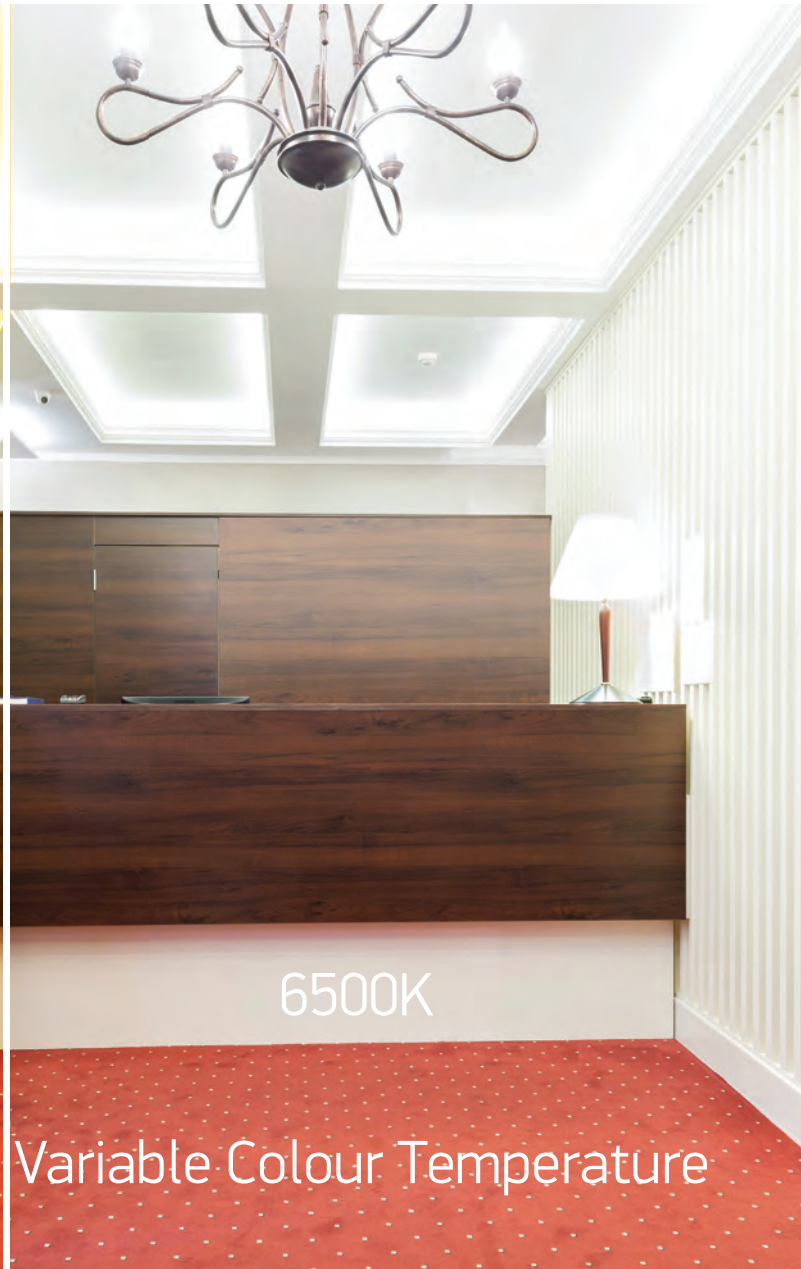


6500K

The 20W/m Variable Colour Temperature



7835/DEW | 20W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

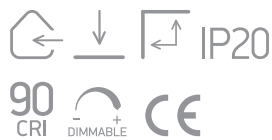

Supplied in 5m roll.



Variable colour temperature.

Cut every 10cm (12-LED segment)




20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A



Remote controller for changing colour temperature from extra warm white to daylight. Suitable for use with LED strips 7835/DEW. 50 meters range, includes dimmer control and programme mode.

58mm

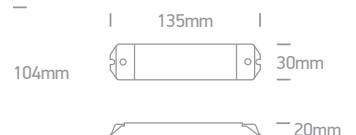

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7835/DEW	Extra warm white - Daylight	2700K - 6500K	20W/m	600lm/m (EW) + 800lm/m (D)	24V DC	◆	40	Requires 12-24V DC driver



LED Strips Complete Sets

<p>RGB</p>	<p>7820A/RGB 2W/m/color SMD 5050 30LEDs/m</p> <p> IP20 DIMMABLE CE </p> <p>Supplied in 5m roll.</p> <p> 10mm </p>
<p>RGB+W</p>	<p>7830A/RGBW 3W/m/color SMD 5050 30LEDs/m</p> <p>3M Double face adhesive.</p> <p> IP20 80 CRI DIMMABLE CE </p> <p>Supplied in 5m roll.</p> <p> 12mm </p>
	<p>7820C/A 2,16W/m SMD 3528 Sensor</p> <p>3M Double face adhesive.</p> <p> IP20 DIMMABLE CE </p> <p> </p> <ul style="list-style-type: none"> • Night time bed light. • Set of 2x1,2m pcs. • Switches ON when you step out of bed.


Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7820A/RGB	RGB	-	2W/m/color	230V / 12V DC		12	Set of LED strip + remote
7830A/RGBW	RGB + Warm white	RGB + 3000K	3W/m/color	100-240V / 12V DC		12	Set of LED strip + remote
7820C/A	Amber	1700K	2,16W/m	100-240V / 12V DC		20	Set of LED strips + sensors

The RGB & RGBW Strips



7830/RGB | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.



Accessories for 7830/RGB




7830/RGB

7834/RGB Power supply cable
7832/RGB Connector




7830/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.



7830W/RGB | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

3M Double face adhesive.



7827 | Mounting clip for 7830W



Order Code	Light Colour	CCT (K)	Watts	Input	Class	Icon	Notes
7830/RGB	RGB	-	14,4W/m	24V DC	III	40	Requires 24V DC driver
7830/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	24V DC	III	40	Requires 24V DC driver
7830W/RGB	RGB	-	14,4W/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight



Surface Slim Profiles

	<p>7901/AL 2m Surface profile + PC opal diffuser Aluminium Suitable for 7823 & 7833 LED Strips 5mm</p>	<p>CE</p>	<p>Complete with 2 pairs end cups & 6pcs metal fixing clips.</p>	<p>8mm 9mm 15mm</p>	
	<p>7836/W 2m Square profile Aluminium Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835C & 7870 LED Strips 12mm</p>	<p>CE</p>	<p>2m Diffuser. Order code 7836A/P Opal.</p>	<p>Complete with 4 pairs end cups, 4 connectors & 6pcs fixing clips.</p>	<p>15mm 12mm</p>
	<p>7836/G 2m Square profile Aluminium Suitable for 7820, 7821, 7825, 7829, 7830, 7831 & 7870 LED Strips 12mm</p>	<p>CE</p>	<p>2m Diffuser. Order code 7836A/P Opal.</p>	<p>Complete with 4 pairs end cups, 4 connectors & 6pcs fixing clips.</p>	<p>15mm 12mm</p>
	<p>7902/AL 2m Surface profile + PC opal diffuser Aluminium Suitable for 7820 & 7821 LED Strips 12mm</p>	<p>CE</p>		<p>Complete with 2 pairs end cups & 6pcs fixing clips.</p>	<p>17mm 9mm</p>
	<p>7902/W 2m Surface profile + PC opal diffuser Aluminium Suitable for 7820 & 7821 LED Strips 12mm</p>	<p>CE</p>		<p>Complete with 2 pairs end cups & 6pcs fixing clips.</p>	<p>17mm 9mm</p>
	<p>7902/B 2m Surface profile + PC opal diffuser Aluminium Suitable for 7820 & 7821 LED Strips 12mm</p>	<p>CE</p>		<p>Complete with 2 pairs end cups & 6pcs fixing clips.</p>	<p>17mm 9mm</p>




Surface Profiles



7904/AL | 2m Surface profile + PC opal diffuser | Aluminium
 Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835 & 7870 LED Strips 12mm




Complete with 2 pairs end caps & 6pcs fixing clips.



7904/W | 2m Surface profile + PC opal diffuser | Aluminium
 Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835 & 7870 LED Strips 12mm




Complete with 2 pairs end caps & 6pcs fixing clips.



7904/B | 2m Surface profile + PC opal diffuser | Aluminium
 Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835 & 7870 LED Strips 12mm



Complete with 2 pairs end caps & 6pcs fixing clips.





Surface /Suspended Wide Profiles

External driver



7912/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm

CE	Complete with 2 pairs end cups.	Optional Trimless kit (10pcs). Order code 7838M.	Optional suspension wire (1pc). Order code 7900P.	Optional 180° connector. Order code 7900C.	Optional 90° connector. Order code 7900R.	



7912/B | 2m Surface/Suspended profile + PC opal diffuser | Aluminium
Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm

CE	Complete with 2 pairs end cups.	Optional Trimless kit (10pcs). Order code 7838M.	Optional suspension wire (1pc). Order code 7900P.	Optional 180° connector. Order code 7900C.	Optional 90° connector. Order code 7900R.	



7912A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium | Suitable for 7880 & 7885 LED Strips 40mm

CE	Complete with 2 pairs end cups.	Optional Trimless kit (10pcs). Order code 7838M.	Optional suspension wire (1pc). Order code 7900P.	Optional 180° connector. Order code 7900C.	Optional 90° connector. Order code 7900R.	



050122 | Profile power supply base | With power cable | Aluminium

CE	IP20			

Order Code	Colour	Input	Class		Notes
050122/W	White	100-240V		30	-
050122/B	Black	100-240V		30	-
050122/G	Grey	100-240V		30	-



Surface/Suspended Wide Profiles


Internal driver



7910/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
 Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm | Use drivers on page 544



Complete with 2 pairs end cups.



Optional Trimless kit (10pcs).
 Order code 7838M.




Optional suspension wire (1pc).
 Order code 7900P.



Optional 180° connector.
 Order code 7900C.



Optional 90° connector.
 Order code 7900R.



7910A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
 Suitable for 7885 LED Strips 45mm | Use drivers on page 544



Complete with 2 pairs end cups.




Optional suspension wire (1pc).
 Order code 7900P.



Optional 180° connector.
 Order code 7900C.



Optional 90° connector.
 Order code 7900R.

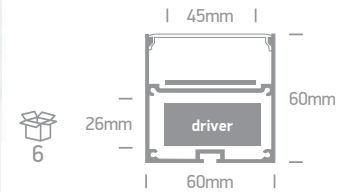


7910A/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
 Suitable for 7885 LED Strips 45mm | Use drivers on page 544



Complete with 2 pairs end cups.




Optional suspension wire (1pc).
 Order code 7900P.




Optional 180° connector.
 Order code 7900C.




Optional 90° connector.
 Order code 7900R.

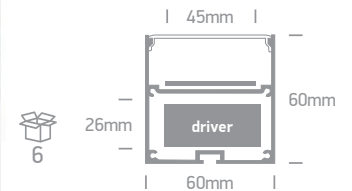


050122 | Profile power supply base | With power cable | Aluminium



050122/B



050122/G



050122/W

Order Code	Colour	Input	Class	Box	Notes
050122/W	White	100-240V	⊕	30	-
050122/B	Black	100-240V	⊕	30	-
050122/G	Grey	100-240V	⊕	30	-




Triangular Profiles



7908A/AL | 2m Triangle profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7829, 7830, 7835 & 7835C LED Strips 10mm




Complete with 2 pairs end cups & 6pcs surface mounting clips.



7908/AL | 2m Triangle profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835, 7835C, 7870 & 7875 LED Strips 16mm




Complete with 2 pairs end cups & 1pc 180° connector.



7908/W | 2m Triangle profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829, 7830, 7831, 7835, 7835C, 7870 & 7875 LED Strips 16mm




Complete with 2 pairs end cups & 1pc 180° connector.




7937T/AL | 2m Surface profile + PC semi-opal diffuser | Aluminium
Suitable for 7820, 7821, 7829, 7830, 7835 & 7835C LED Strips 12mm



Complete with 2 pairs end cups.




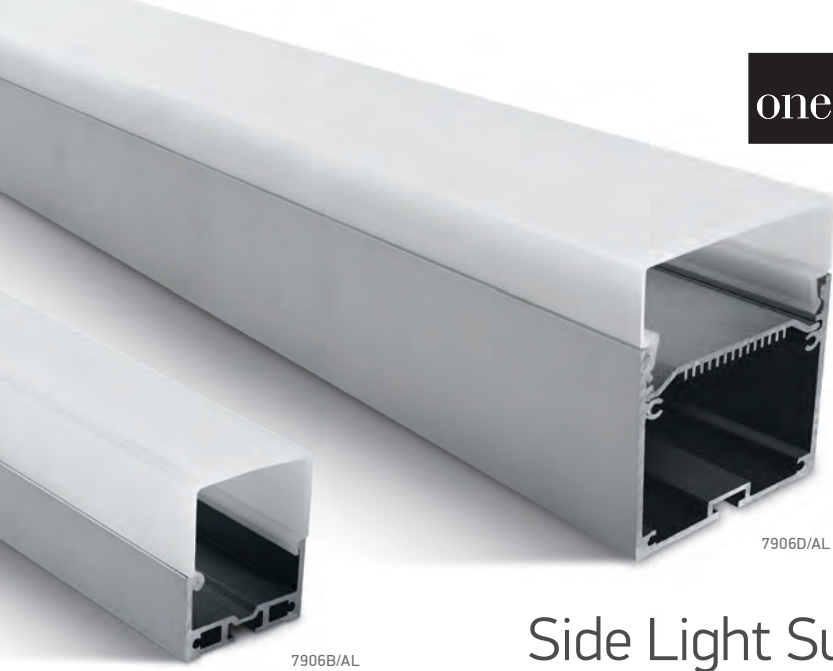


7906B/AL

7906D/AL


Side Light Surface & Suspended Profiles




7906/AL | 2m Surface profile + PMMA opal square diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7829, 7830, 7831 & 7835 LED Strips 15mm






7906A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7830, 7835, 7845, 7875, 7870 & 7887 LED Strips 16mm




7906B/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7845, 7882, 7875, 7880 & 7887 LED Strips 30mm



7906C/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7882, 7845, 7875, 7880 & 7887 LED Strips 30mm | Use drivers on page 544



7906D/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7885 & 7880 LED Strips 40mm | Use drivers on page 544






Up/Down Light Wall Profile









7916/AL | 2m Wall mounted profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829, 7830, 7835, 7845, 7870, 7875, 7880 & 7887 LED Strips | Use drivers on page 544






Complete with
2 pairs end cups &
5 pcs fixing clips.






Recessed Profiles


	<p>7901R/AL 2m Recessed profile + PC opal diffuser Aluminium Suitable for 7823 & 7833 LED Strips 5mm</p>
	<p>7902R/AL 2m Recessed profile + PC opal diffuser Aluminium Suitable for 7820 & 7821 LED Strips 12mm</p>
	<p>7902R/W 2m Recessed profile + PC opal diffuser Aluminium Suitable for 7820 & 7821 LED Strips 12mm</p>
	<p>7902R/B 2m Recessed profile + PC opal diffuser Aluminium Suitable for 7820 & 7821 LED Strips 12mm</p>
	<p>7904R/AL 2m Recessed profile + PC opal diffuser Aluminium Suitable for 7820, 7821, 7825, 7829 7830, 7831, 7835 & 7870 LED Strips 12mm</p>
	<p>7904R/W 2m Recessed profile + PC opal diffuser Aluminium Suitable for 7820, 7821, 7825, 7829 7830, 7831, 7835 & 7870 LED Strips 12mm</p>

7901R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7823 & 7833 LED Strips 5mm


 120



 Complete with 2 pairs end cups.



 8x2000mm
 13mm



7902R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm




 Complete with 2 pairs end cups.

 18x2000mm
 10mm



7902R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm




 Complete with 2 pairs end cups.

 18x2000mm
 10mm



7902R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips 12mm




 Complete with 2 pairs end cups.

 18x2000mm
 10mm



7904R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829 7830, 7831, 7835 & 7870 LED Strips 12mm




 Complete with 2 pairs end cups.

 18x2000mm
 16mm




7904R/W | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829 7830, 7831, 7835 & 7870 LED Strips 12mm




 Complete with 2 pairs end cups.

 18x2000mm
 16mm



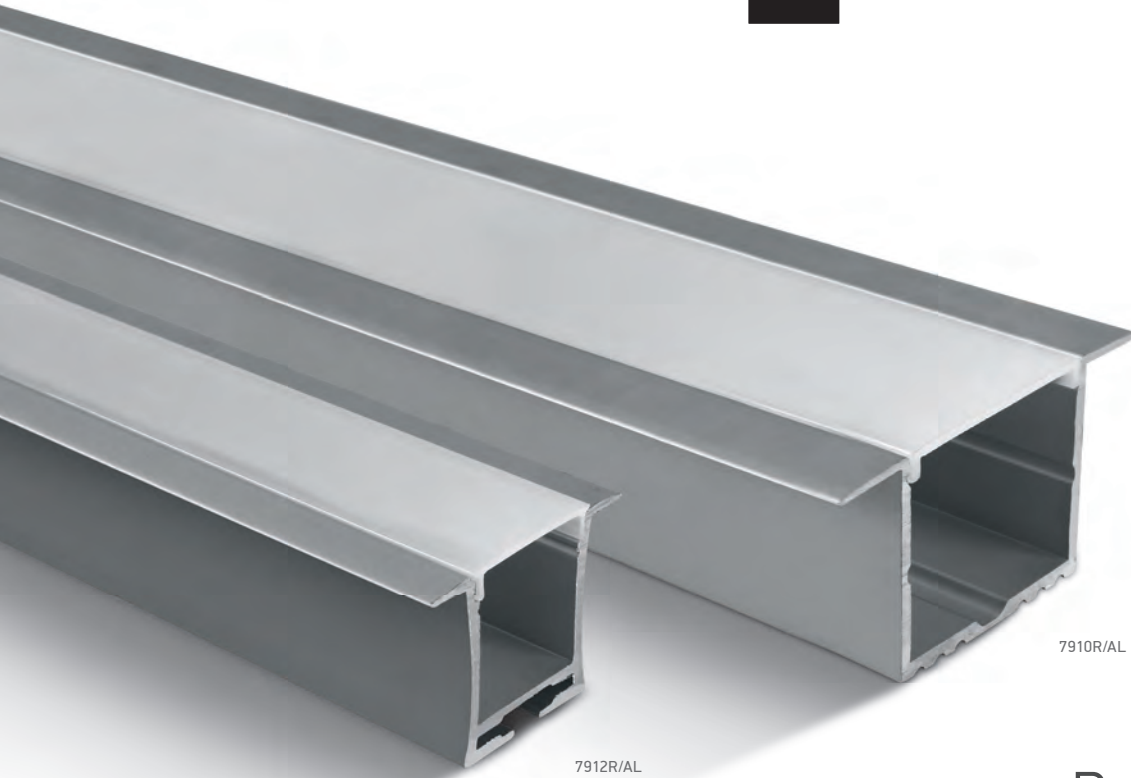




7910R/AL

7912R/AL




Recessed Profiles






7906R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7829, 7830, 7831 & 7835 LED Strips 20mm




7906R/W | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7829, 7830, 7831 & 7835 LED Strips 20mm




7912R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7825, 7829, 7830, 7831, 7835, 7845, 7870, 7875, 7880 & 7887 LED Strips 20mm



7912R/B | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7825, 7829, 7830, 7831, 7835, 7845, 7870, 7875, 7880 & 7887 LED Strips 20mm



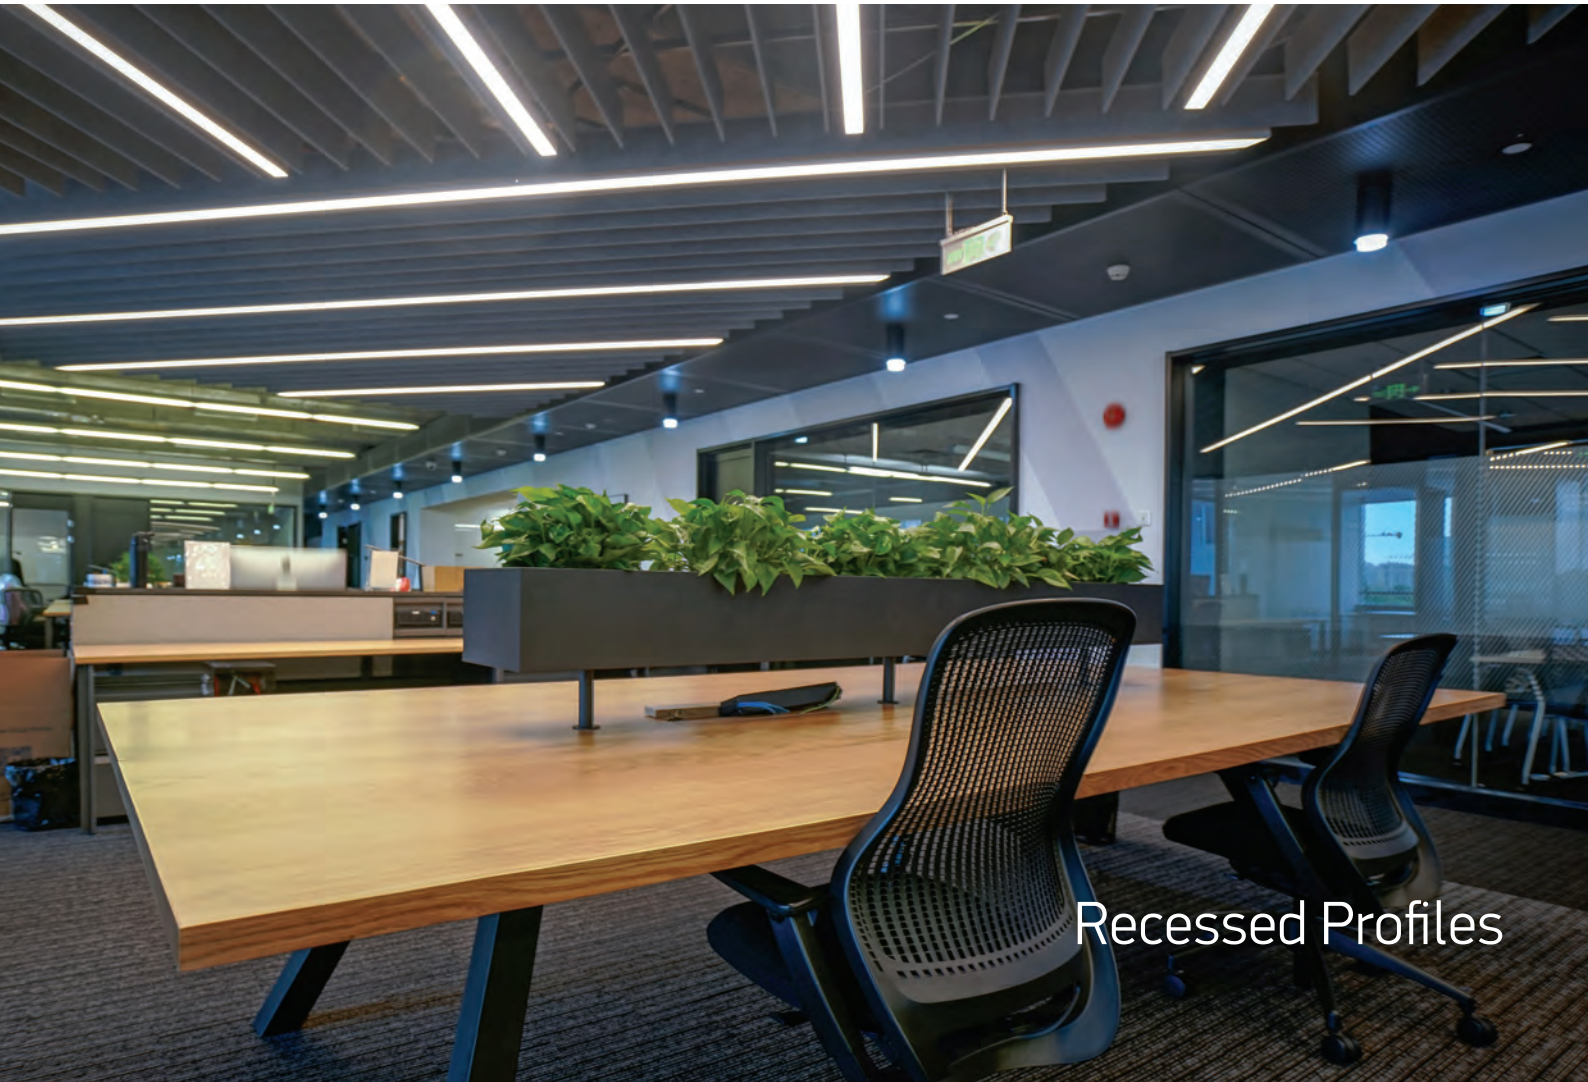

Recessed Profiles



7910R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm




Complete with 2 pairs end caps & 4pcs fixing clips with screws.



40x2000mm



40mm



7910R/B | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7825, 7845, 7870, 7875, 7880, 7882 & 7887 LED Strips 25mm





Complete with 2 pairs end caps & 4pcs fixing clips with screws.



40x2000mm



40mm



7910AR/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7875, 7880 & 7885 LED Strips 40mm




Complete with 2 pairs end caps & 4pcs metal fixing clips.




52x2000mm



35mm




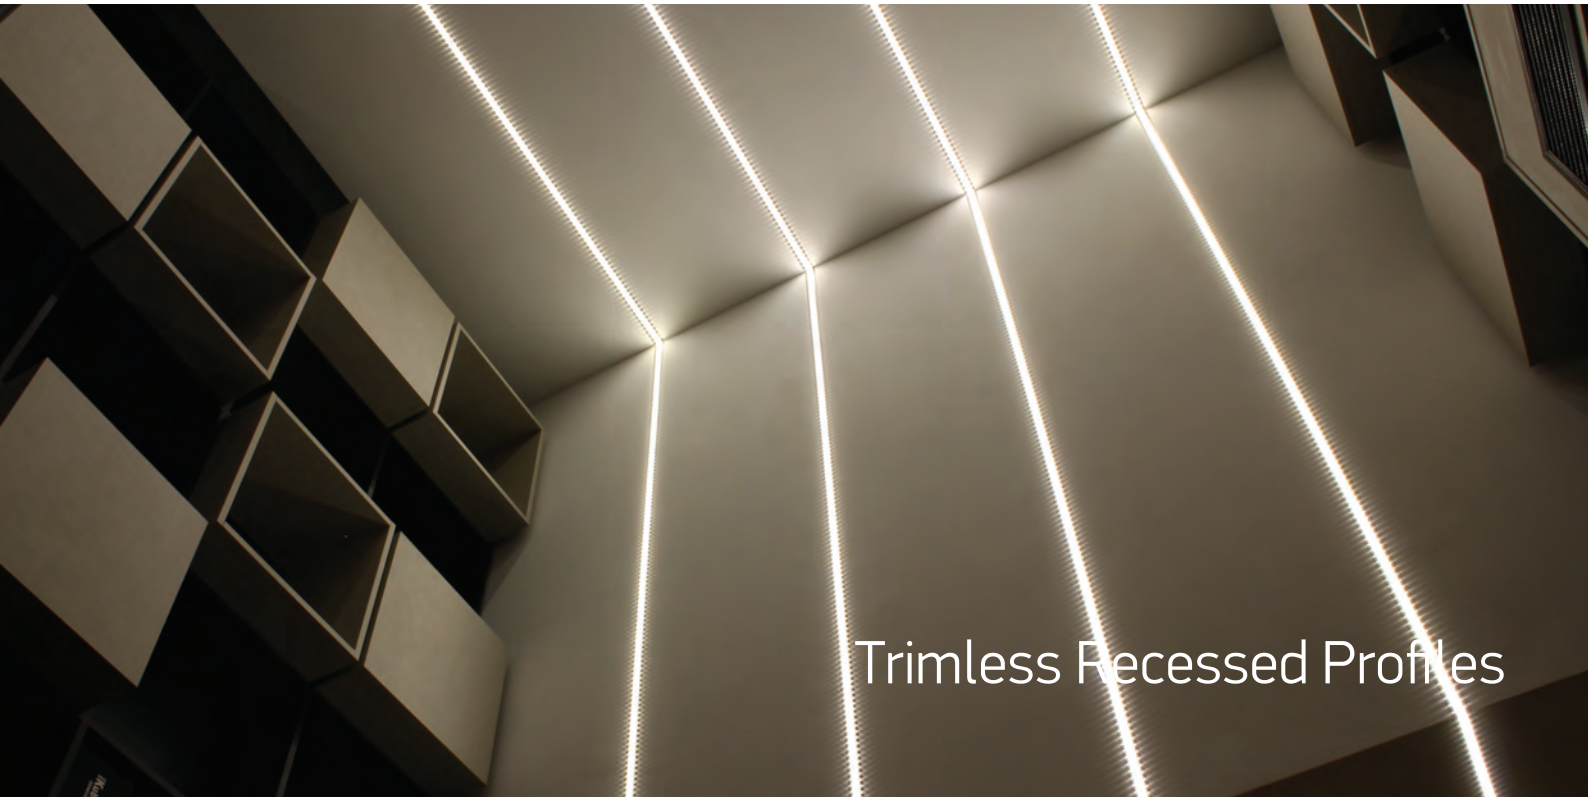


Trimless Recessed Profiles





7901TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7823, 7829 & 7833 LED Strips 9mm




7904TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7829, 7830, 7835, 7870 & 7875 LED Strips 20mm



7906TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7875 & 7880 LED Strips 37mm



7904ATR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7829, 7830, 7835, 7845, 7870, 7875 & 7887 LED Strips 20mm






IP67 & IP68 Profiles





7918/W | 2m White profile + PMMA opal diffuser | Plastic | Suitable for 7820, 7821 & 7829 LED Strips 8mm


IP68
CE



7914R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium | Suitable for 7820, 7821 & 7829 LED Strips 8mm

IP67
CE 20



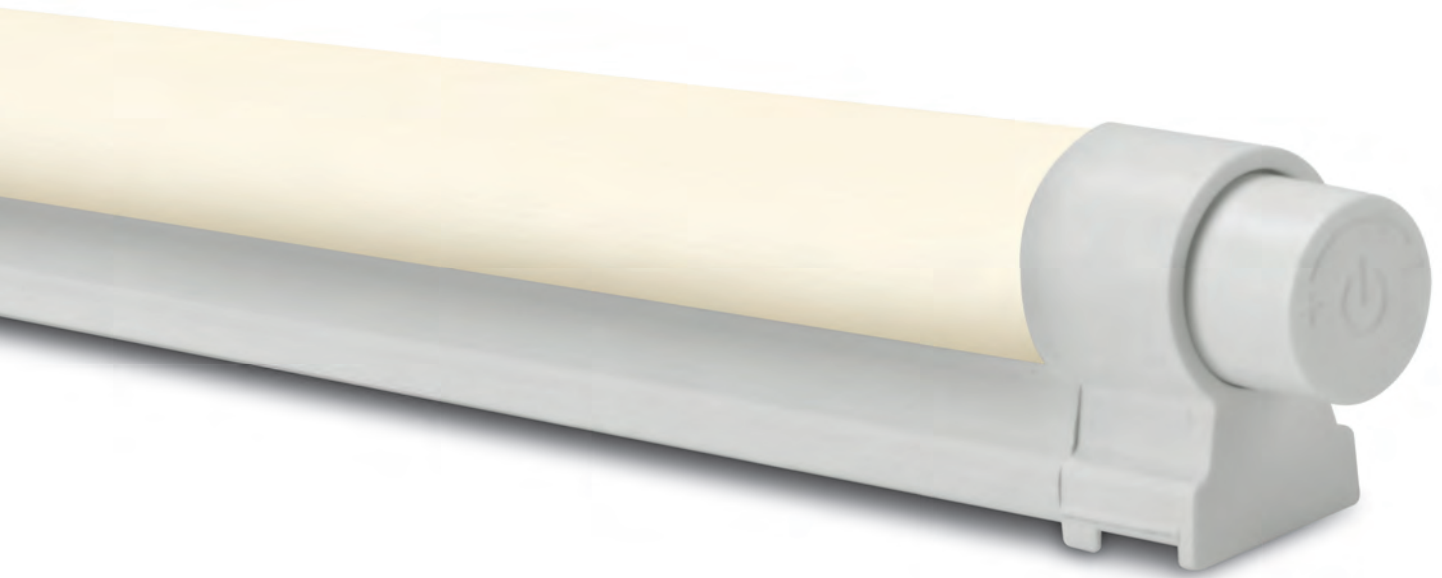

Colour Temperature Variable Mirror Light

Dimmable



38110BD | 10W | SMD 2835 | PC

Variable colour temperature and dimmable.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38110BD	Extra warm white - Daylight	2700K - 6500K	10W	700lm	230V		1,5m	20	Complete with driver



The 230V Solid LED Strip

Plastic



38104B | 4W | SMD 2835 | Plastic

Connect 25 fittings maximum.



38108B | 8W | SMD 2835 | Plastic








Connect 12 fittings maximum.



38114B | 14W | SMD 2835 | Plastic

Connect 7 fittings maximum.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38104B/C	Cool white	4000K	4W	320lm	230V		30	Complete with driver
38104B/W	Warm white	3000K	4W	320lm	230V		30	Complete with driver
38108B/C	Cool white	4000K	8W	640lm	230V		30	Complete with driver
38108B/W	Warm white	3000K	8W	640lm	230V		30	Complete with driver
38114B/C	Cool white	4000K	14W	1120lm	230V		30	Complete with driver
38114B/W	Warm white	3000K	14W	1120lm	230V		30	Complete with driver




The 230V Solid LED Strip

Aluminium + PC



38104L | 4W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.



38115L | 15W | LED | Aluminium + PC


Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	📦	Notes
38104L/D	Daylight	6000K	4W	305lm	100-240V	Ⓢ	50	Includes power supply cable, corner cable, connector
38104L/W	Warm white	3000K	4W	280lm	100-240V	Ⓢ	50	Includes power supply cable, corner cable, connector
38115L/C	Cool white	4000K	15W	1095lm	100-240V	Ⓢ	30	Includes power supply cable, corner cable, connector


The 230V Solid Double LED Strip

Aluminium + PC




38207L | 7W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.




38215L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.



38230L | 30W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
38207L/D	Daylight	6000K	7W	530lm	100-240V	⊕	30	Includes power supply cable, corner cable, connector
38207L/C	Cool white	4000K	7W	510lm	100-240V	⊕	30	Includes power supply cable, corner cable, connector
38207L/W	Warm white	3000K	7W	490lm	100-240V	⊕	30	Includes power supply cable, corner cable, connector
38215L/D	Daylight	6000K	15W	1140lm	100-240V	⊕	25	Includes power supply cable, corner cable, connector
38215L/W	Warm white	3000K	15W	1050lm	100-240V	⊕	25	Includes power supply cable, corner cable, connector
38230L/D	Daylight	6000K	30W	2280lm	100-240V	⊕	20	Includes power supply cable, corner cable, connector
38230L/C	Cool white	4000K	30W	2190lm	100-240V	⊕	20	Includes power supply cable, corner cable, connector
38230L/W	Warm white	3000K	30W	2100lm	100-240V	⊕	20	Includes power supply cable, corner cable, connector




The LED Shelf System

Aluminium + PC




38103 | 3W | SMD 3014 | Aluminium + PC

IP20 80 CRI
 DIMMABLE QUICK FIX CE

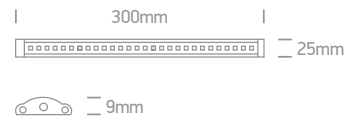


38105 | 5W | SMD 3014 | Aluminium + PC

IP20 80 CRI
 DIMMABLE QUICK FIX CE

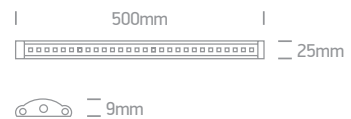

38110 | 10W | SMD 3014 | Aluminium + PC


IP20 80 CRI
 DIMMABLE QUICK FIX CE

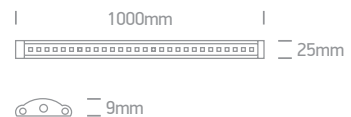

12122 | 3W | SMD 3528 | Aluminium + PC



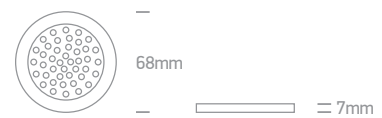


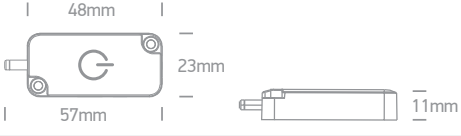





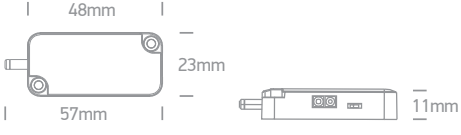








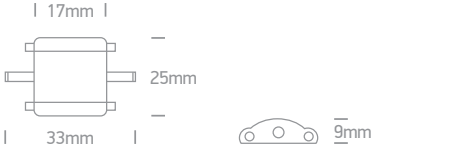








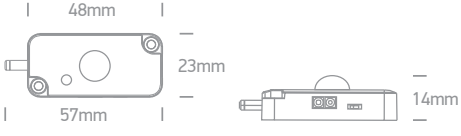





Can be fixed with double face adhesive or screws.

IP20 80 CRI
 DIMMABLE QUICK FIX CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
38103/W	-	Warm white	3000K	3W	225lm	24V DC	III	100	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38105/W	-	Warm white	3000K	5W	375lm	24V DC	III	50	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38110/W	-	Warm white	3000K	10W	750lm	24V DC	III	25	Requires 24V DC driver / Includes mounting clips (3pcs), screws (3pcs)
12122/G/W	Grey	Warm white	3000K	3W	180lm	24V DC	III	100	Requires 24V DC driver

The LED Shelf System Accessories

	<p>38102A Touch ON/OFF and dimmer Max. 60W 24V DC</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 15%;">   </div> <div style="width: 30%;">  <p>Touch ON/OFF</p> </div> <div style="width: 30%;">  <p>Hold to DIM</p> </div> <div style="width: 25%;">  </div> </div>
	<p>38102B Wave hand Door ON/OFF Max. 60W 24V DC</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 15%;">   </div> <div style="width: 30%;">  <p>Lights OFF</p> </div> <div style="width: 30%;">  <p>Lights ON</p> </div> <div style="width: 25%;">  </div> </div>
	<p>38102C PIR Sensor Max. 60W 24V DC</p> <p style="text-align: right;">Adjustable 1min / 5min.</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 15%;">   </div> <div style="width: 30%;">  <p>Move hand to switch ON/OFF the lights.</p> </div> <div style="width: 25%;">  </div> </div>
	<p>38101A Connector for 38103, 38105 & 38110</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 15%;">   </div> <div style="width: 25%;">  </div> </div>
	<p>38101B Corner for 38103, 38105 & 38110</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 15%;">   </div> <div style="width: 25%;">  </div> </div>
	<p>38101C Power supply cable connector for 38103, 38105 & 38110</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 15%;">   </div> <div style="width: 15%;">  <p>100cm</p> </div> <div style="width: 25%;">  </div> </div>
	<p>38101D 8 - Way connection box 24V DC</p> <div style="display: flex; justify-content: space-between;"> <div style="width: 15%;">   </div> <div style="width: 15%;">  <p>100cm</p> </div> <div style="width: 25%;">  </div> </div>



The 230V IP65 Range



7850 | 6W/m | SMD 3528 | 60LEDs/m | PVC

Cut every 1m.

IP65
 80 CRI CE



Supplied in 100m roll.



Accessories for 7850

IP65
 80 CRI CE

- 7850C Connector
- 7850P 230V Power supply for 100m
- 7850F Fixing clip
- 7850E End cup



7860 | 9W/m | SMD 5050 | 60LEDs/m | PVC

Cut every 1m.

IP65
 80 CRI CE



Supplied in 50m roll.



Accessories for 7860

IP65
 80 CRI CE

- 7860C Connector
- 7860P 230V Power supply for 50m
- 7860F Fixing clip
- 7860E End cup

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7850/D	Daylight	6000K	6W/m	320lm/m	230V		100m roll	Requires 7850P power supply
7850/C	Cool white	4000K	6W/m	310lm/m	230V		100m roll	Requires 7850P power supply
7850/W	Warm white	3000K	6W/m	300lm/m	230V		100m roll	Requires 7850P power supply
7850/BL	Blue	-	6W/m	-	230V		100m roll	Requires 7850P power supply
7860/D	Daylight	6000K	9W/m	900lm/m	230V		50m roll	Requires 7860P power supply
7860/C	Cool white	4000K	9W/m	900lm/m	230V		50m roll	Requires 7860P power supply
7860/W	Warm white	3000K	9W/m	860lm/m	230V		50m roll	Requires 7860P power supply




The 230V Lightline



7800/C | 6,6W/m | LED | PVC

Cut every 2m.

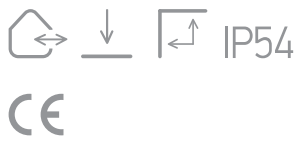

Supplied in 50m roll.



7804 | Power supply for 7800

Connect maximum 30m.



Accessories for 7800



Part Number	Description	Quantity
7802	Connector	720
7806	Fixing clip	2400
7807	End cup	1200

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Notes
7800/C	Cool white	4000K	6,6W/m	324lm/m	230V	□	Requires 7804 power supply

24V Linkable Modules

Aluminium


	<p>38001A 1W LED Aluminium</p> <p> </p> <p> </p> <p> </p>																											
	<p>38002A 3W LED Aluminium</p> <p> </p> <p> </p> <p> </p>																											
	<p>38005A 6W LED Aluminium</p> <p> </p> <p> </p> <p> </p>																											
	<p>38006 & 38007 Power supply cable and corner cable for 38001A, 38002A & 38005A</p> <p> </p> <p> </p> <table border="1"> <thead> <tr> <th colspan="2"></th> <th></th> </tr> </thead> <tbody> <tr> <td colspan="2">Power supply cable</td> <td></td> </tr> <tr> <td>38006A</td> <td>For DL and WW</td> <td>200</td> </tr> <tr> <td>38006B</td> <td>For BL</td> <td>200</td> </tr> <tr> <td>38006C</td> <td>For RGB</td> <td>200</td> </tr> <tr> <td colspan="2">Corner cable</td> <td></td> </tr> <tr> <td>38007A</td> <td>For DL and WW</td> <td>200</td> </tr> <tr> <td>38007B</td> <td>For BL</td> <td>200</td> </tr> <tr> <td>38007C</td> <td>For RGB</td> <td>200</td> </tr> </tbody> </table>				Power supply cable			38006A	For DL and WW	200	38006B	For BL	200	38006C	For RGB	200	Corner cable			38007A	For DL and WW	200	38007B	For BL	200	38007C	For RGB	200
Power supply cable																												
38006A	For DL and WW	200																										
38006B	For BL	200																										
38006C	For RGB	200																										
Corner cable																												
38007A	For DL and WW	200																										
38007B	For BL	200																										
38007C	For RGB	200																										

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38001A/D	Daylight	6000K	1W	64lm	24V DC		100	Requires 24V DC driver
38001A/W	Warm white	3000K	1W	60lm	24V DC		100	Requires 24V DC driver
38001A/BL	Blue	-	1W	-	24V DC		100	Requires 24V DC driver
38001A/RGB	RGB	-	1W	-	24V DC		100	Requires 24V DC driver
38002A/D	Daylight	6000K	3W	144lm	24V DC		100	Requires 24V DC driver
38002A/W	Warm white	3000K	3W	135lm	24V DC		100	Requires 24V DC driver
38002A/BL	Blue	-	3W	-	24V DC		100	Requires 24V DC driver
38002A/RGB	RGB	-	3W	-	24V DC		100	Requires 24V DC driver
38005A/D	Daylight	6000K	6W	384lm	24V DC		100	Requires 24V DC driver
38005A/W	Warm white	3000K	6W	360lm	24V DC		100	Requires 24V DC driver
38005A/BL	Blue	-	6W	-	24V DC		100	Requires 24V DC driver

IP67 Flex Lightline



7811 | 10W/m | SMD 2216 | 192 LEDs | Silicone



Supplied in 5m roll.



Accessories for 7811



7811F Fixing clip
7811E End cup

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
7811/C	Cool white	4000K	10W/m	550lm/m	24V DC	II	40	Requires 24V DC driver
7811/W	Warm white	3000K	10W/m	550lm/m	24V DC	II	40	Requires 24V DC driver

Flex Lightline










7810/D









































	<p>7810/D 4,8W/m LED Silicone</p> <p>↔ ↓ ↕ IP54</p> <p>CE</p>		<p>7810/P 4,8W/m LED Silicone</p> <p>↔ ↓ ↕ IP54</p> <p>CE</p>
	<p>7810/BL 4,8W/m LED Silicone</p> <p>↔ ↓ ↕ IP54</p> <p>CE</p>		<p>7810/RBL 4,8W/m LED Silicone</p> <p>↔ ↓ ↕ IP54</p> <p>CE</p>
	<p>7810/R 4,8W/m LED Silicone</p> <p>↔ ↓ ↕ IP54</p> <p>CE</p>		<p>7810/RGB 15,5W/m LED Silicone</p> <p>↔ ↓ ↕ IP54</p> <p>CE</p>



NOTE:
All models can be cut every 1m.
Supplied in 50m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7810/D	Daylight	6000K	4,8W/m	180lm/m	230V		50m roll	Requires 7814 power supply
7810/BL	Blue	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply
7810/R	Red	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply
7810/P	Pink	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply
7810/RBL	Red + Blue	-	4,8W/m	-	230V		50m roll	Requires 7818 controller RBL
7810/RGB	RGB	-	15,5W/m	-	230V		50m roll	Requires 7819 controller RGB

Flex Lightline Accessories

	<p>7814 Power supply for 7810 Connect maximum 50m.</p>					
	<p>7818 RBL Controller for 7810/RBL Connect maximum 30m.</p> <p>7819 RGB Controller for 7810/RGB Connect maximum 15m.</p>					
	<p>Accessories for 7810</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;"></td> <td style="width: 15%; text-align: center;">   </td> <td style="width: 40%;"></td> <td style="width: 10%;"></td> <td style="width: 20%; text-align: right;">  7812 Connector 400 7817 End cup 25 </td> </tr> </table>		 			 7812 Connector 400 7817 End cup 25
	 			 7812 Connector 400 7817 End cup 25		
	<p>7815 2m Profile for 7810 Aluminium</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;"></td> <td style="width: 15%; text-align: center;">   </td> <td style="width: 40%;">  </td> <td style="width: 10%;"></td> <td style="width: 20%; text-align: right;">  7815/W White 10 7815/G Grey </td> </tr> </table> <div style="text-align: right; margin-top: 10px;">  <p>15mm 21mm 50mm</p> </div>		 			 7815/W White 10 7815/G Grey
	 			 7815/W White 10 7815/G Grey		
	<p>7815B Housing box for 7814, 7818 & 7819</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;"></td> <td style="width: 15%; text-align: center;">   </td> <td style="width: 40%;">  </td> <td style="width: 10%;"></td> <td style="width: 20%; text-align: right;">  7815B/W White 8 7815B/G Grey </td> </tr> </table> <div style="text-align: right; margin-top: 10px;">  <p>125mm 35.5mm 83mm</p> </div>		 			 7815B/W White 8 7815B/G Grey
	 			 7815B/W White 8 7815B/G Grey		

Order Code	Colour	Input	Class			Notes
7814	White	230V	□	150cm	100	-
7818	White	230V	□	80cm	48	-
7819	White	230V	□	80cm	5	-